

BF201

1 to 5 sections



Flow 20 l/min

Ports threads 1/4" BSP /
SAE 6

2 Inlet and Outlet ports

Prepared for High
pressure Carry Over

(Power Beyond)

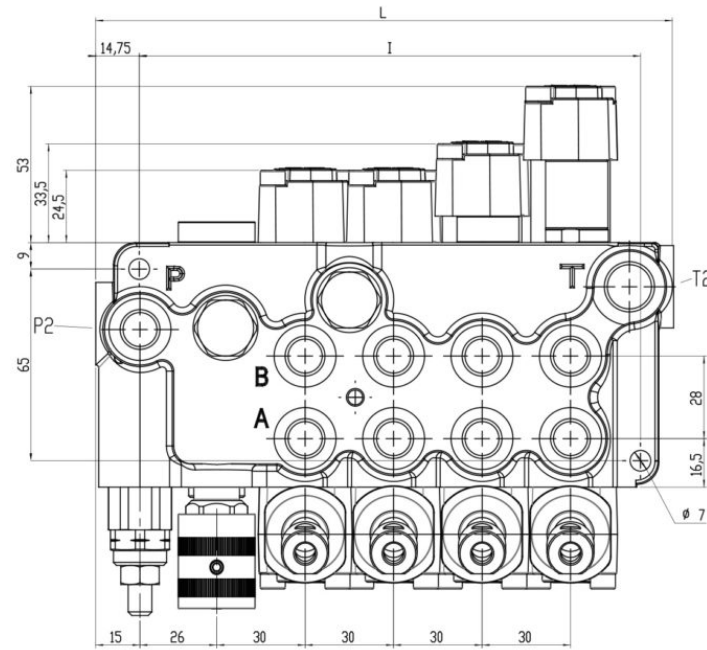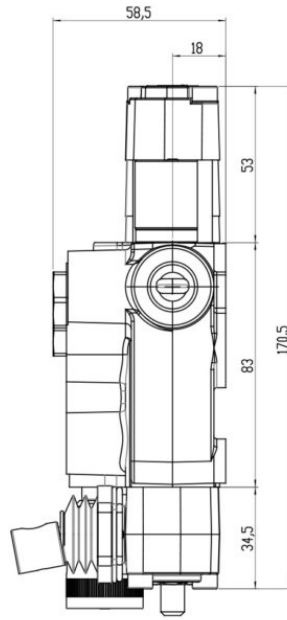

SPECIFICHE TECNICHE / TECHNICAL SPECIFICATIONS

PORTATA NOMINALE / NOMINAL FLOW	17 L/min	4,5 GPM
PORTATA MAX / MAX FLOW	25 L/min	6,6 GPM
PRESSIONE NOMINALE / NOMINAL PRESSURE	250 bar	3600 PSI
PRESSIONE MAX SUGLI UTILIZZI / MAX PRESSURE ON PORTS	320 bar	4700 PSI

FILETTATURE STANDARD / STANDARD THREADS

	A - B	P	T	P2	T2
G (BSP)	1/4"	1/4"	3/8"	3/8"	3/8"
F (UNF - SAE 6)	9/16"-18	9/16"-18	3/4"-16	3/4"-16	3/4"-16

SPECIFICHE TECNICHE / TECHNICAL SPECIFICATIONS

CONTROPRESSIONE MAX ALLO SCARICO / MAX PRESSURE ON TANK LINE	80 bar	1100 PSI
--	--------	-------------

TRAFILAMENTI INTERNI / INTERNAL OIL LEAKAGE

A - B → T	4 ÷ 8 cc/min
-----------	-----------------

CONDIZIONI DI TEST / TESTING CONDITIONS

PRESSIONE / PRESSURE	100 bar
TEMPERATURA DELL'OLIO / OIL TEMPERATURE	40 °C
VISCOSITÀ DELL'OLIO / OIL VISCOSITY	32 mm ² /s

DIMENSIONI / DIMENSIONS

N. DI SEZIONI N. OF SECTIONS	L		l	
	mm	inch	mm	inch
BF201/1	107	4,21	80	3,15
BF201/2	136	5,35	110	4,33
BF201/3	166	6,54	140	5,51
BF201/4	196	7,72	170	6,69
BF201/5	226	8,90	200	7,87

PERDITE DI CARICO / PRESSURE DROP

