

BM50

1 to 8 sections

Flow 50 l/min

Ports threads 1/2" BSP /



SAE 10

2 Inlet and Outlet ports

Prepared for High

pressure Carry Over

(Power Beyond)

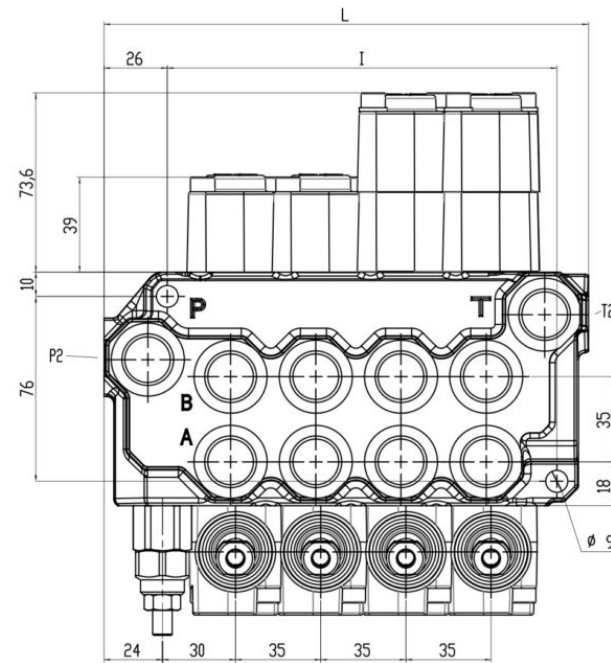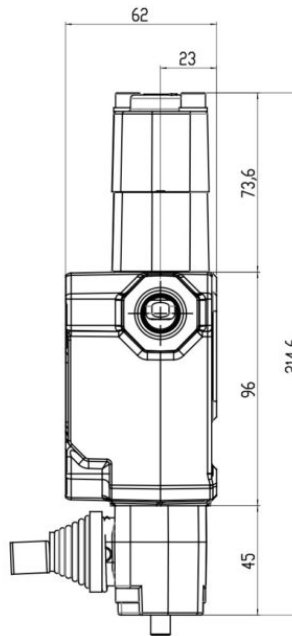

SPECIFICHE TECNICHE / TECHNICAL SPECIFICATIONS

PORTATA NOMINALE / NOMINAL FLOW	50 L/min	13,1 GPM
PORTATA MAX / MAX FLOW	60 L/min	15,9 GPM
PRESSIONE NOMINALE / NOMINAL PRESSURE	250 bar	3600 PSI
PRESSIONE MAX SUGLI UTILIZZI / MAX PRESSURE ON PORTS	320 bar	4700 PSI

FILETTATURE STANDARD / STANDARD THREADS

	A - B	P	T	P2	T2
G (BSP)	1/2"	1/2"	1/2"	1/2"	1/2"
F (UNF - SAE 10)	7/8"-14	7/8"-14	7/8"-14	7/8"-14	7/8"-14

SPECIFICHE TECNICHE / TECHNICAL SPECIFICATIONS

CONTROPRESSIONE MAX ALLO SCARICO / MAX PRESSURE ON TANK LINE	80 bar	1100 PSI
--	--------	----------

TRAFILAMENTI INTERNI / INTERNAL OIL LEAKAGE

A - B → T	4 ÷ 8 cc/min
-----------	--------------

CONDIZIONI DI TEST / TESTING CONDITIONS

PRESSIONE / PRESSURE	100 bar
TEMPERATURA DELL'OLIO / OIL TEMPERATURE	40 °C
VISCOSITÀ DELL'OLIO / OIL VISCOSITY	32 mm ² /s

DIMENSIONI / DIMENSIONS

N. DI SEZIONI N. OF SECTIONS	L		l	
	mm	inch	mm	inch
BM50/1	94	3,70	55	2,17
BM50/2	129	5,08	90	3,54
BM50/3	164	6,46	125	4,92
BM50/4	199	7,83	160	6,30
BM50/5	234	9,21	195	7,68
BM50/6	269	10,59	230	9,06
BM50/8	339	13,35	300	11,81

PERDITE DI CARICO / PRESSURE DROP

