


AD3V...	
"D15" DC COILS	CAP.I • 19
STANDARD CONNECTORS	CAP.I • 20

- This variant has a Zinc-Nickel surface treatment on metallic parts for a higher corrosion resistance
- Coil windings are sealed and outer metal housing has eCoat surface treatment
- The complete valve withstands more than 700 hours exposure of Salt Spray Test (test performed according to UNI EN ISO 9227 and evaluation according to UNI EN ISO10289).
- The plastic blind retainer is assembled as standard to protect the end surface of solenoid tube

## OVERALL DIMENSIONS

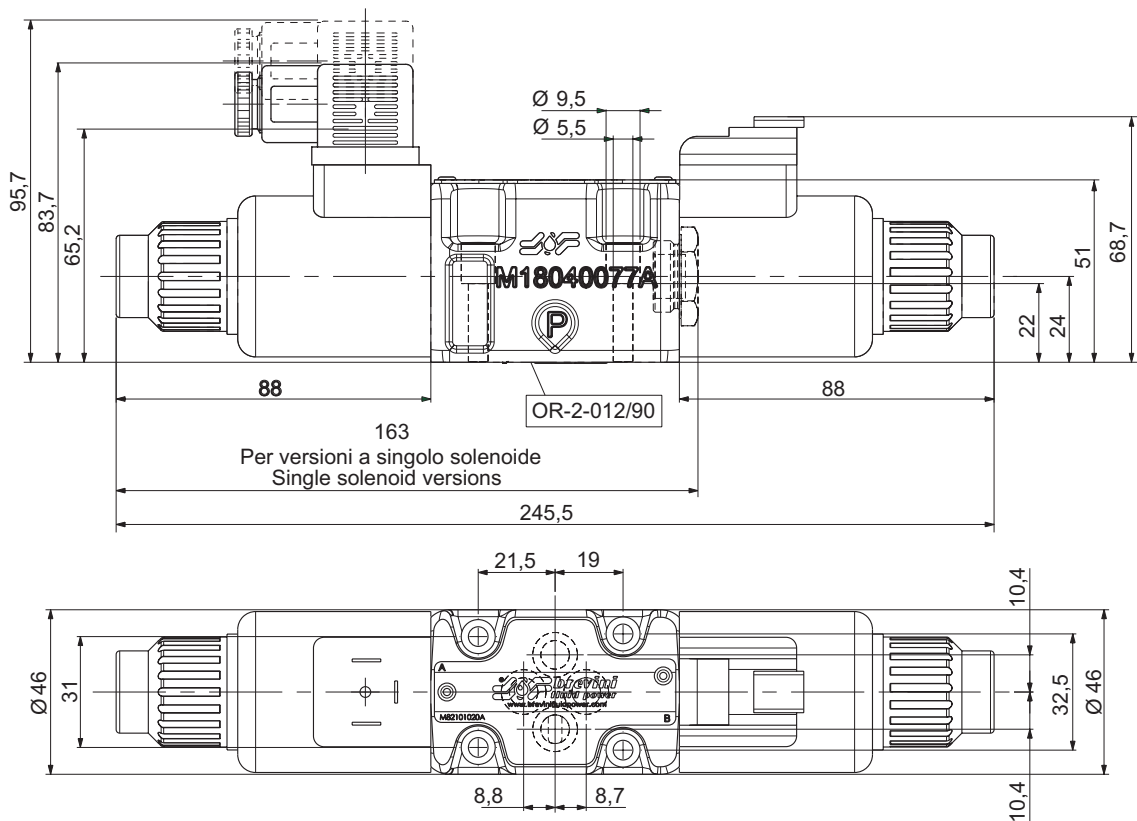

Fixing screws UNI 5931M5x40  
with material specifications min. 8.8  
Tightening torque 5 Nm / 0.5 Kgm

Support plane specifications

